


CoroBore® BR20/BR10

Rough boring tools

SANDVIK
coromant

92085


Learn more about the offer
[sandvik.coromant.com/
coroborebr20](https://sandvik.coromant.com/coroborebr20)

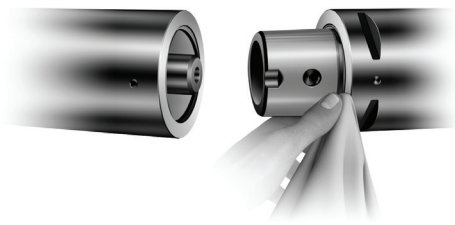


Light grease



Nm

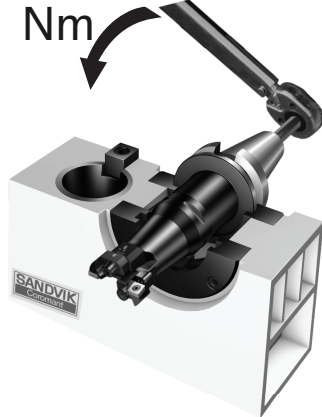


CC size	Torque (Nm) [lbf-ft]
C3	40-50 [30-37]
C4	50-60 [37-44]
C5	90-100 [66-74]
C6 / C8	160-180 [118-133]

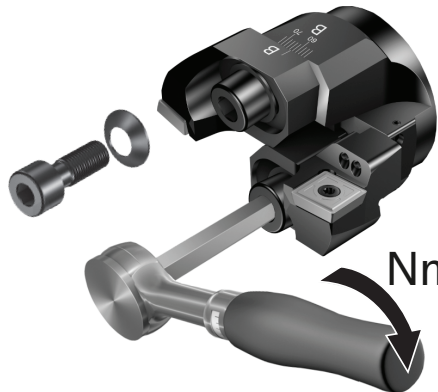


Nm

BR20/BR10 size	Torque (Nm) [lbf-ft]
A, B	4.8 [3.5]
C	9.0 [6.6]
D	16 [12]
E	38 [28]
F, G, H	75 [55]




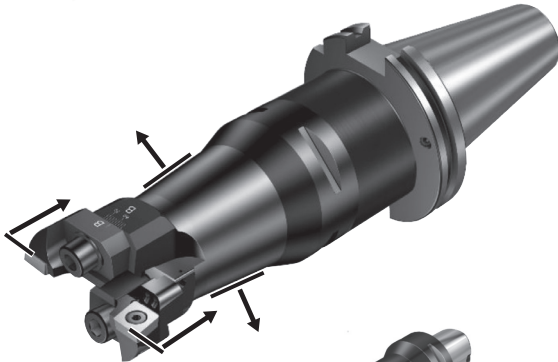


Nm

Insert size	Torque (Nm) [lbf-ft]
CC06/CC2(1.5)	0.9 [0.7]
CC09/CC3(2.5)	3.0 [2.2]
CC12/CC431	3.0 [2.2]
SP06	0.8 [0.6]
SP08	1.7 [1.3]
SP12	2.0 [1.5]
TC09/TC1.8(1.5)	0.8 [0.6]
TC11/TC2(1.5)	0.9 [0.7]
TC16/TC3(2.5)	3.0 [2.2]

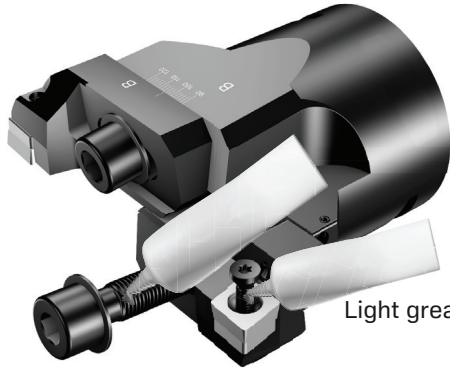


Light grease

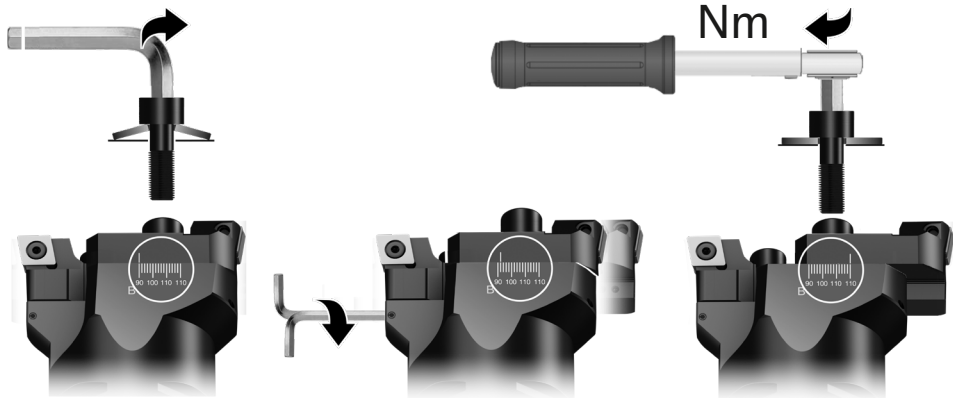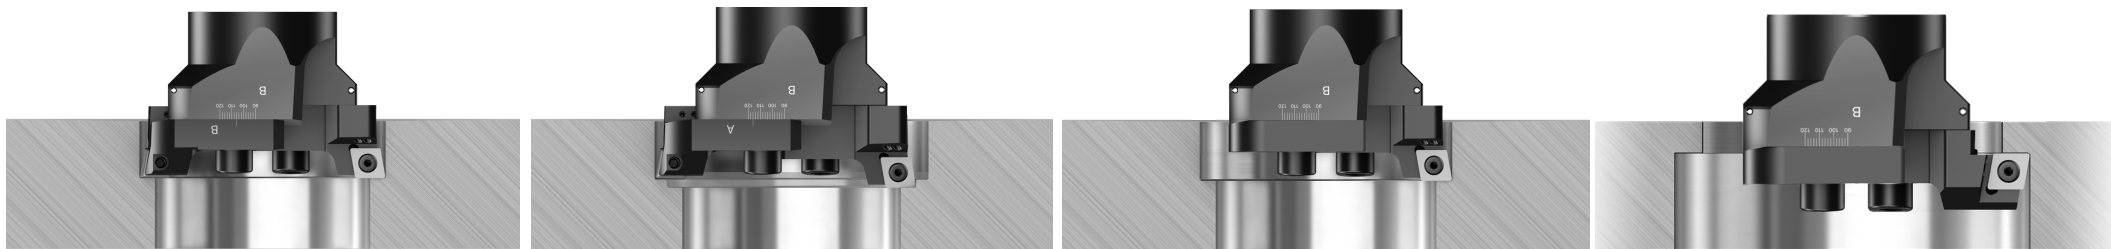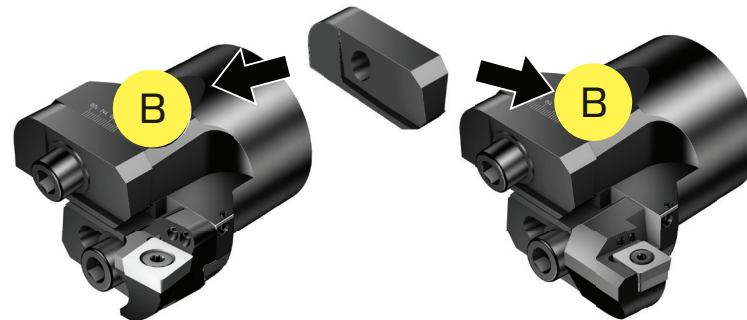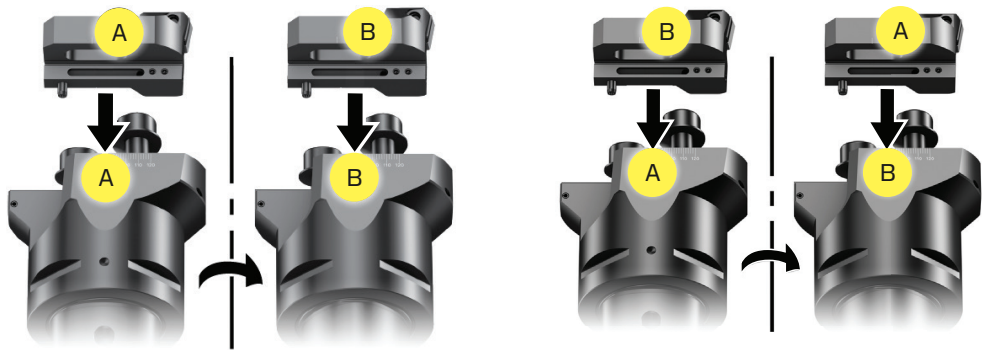

Slide size	Nozzle part no	d [mm] (in)
E, F, G, H	5691 026-11	0.6 (0.02)
	5691 026-12	0.8 (0.03)
	5691 026-13 ¹	1.0 (0.04)
	5691 026-14	1.2 (0.05)
	5691 026-15	1.4 (0.055)
	5691 026-16	1.5 (0.06)

¹ standard

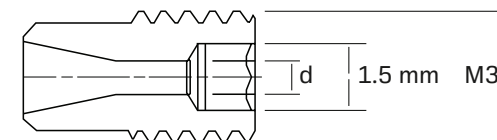

Allen key size [mm]	Product code
1.5	3021 012-015

