
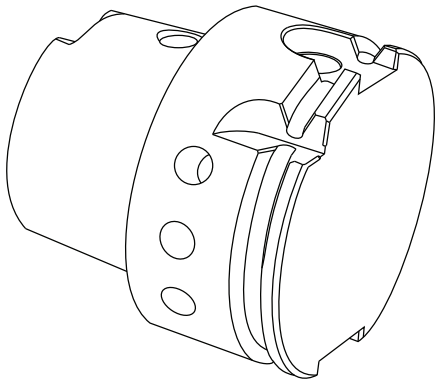



# HSK solid adaptors

## Balancing holes

HSK40 / HSK50




HSK63 / HSK80  
HSK100/HSK125

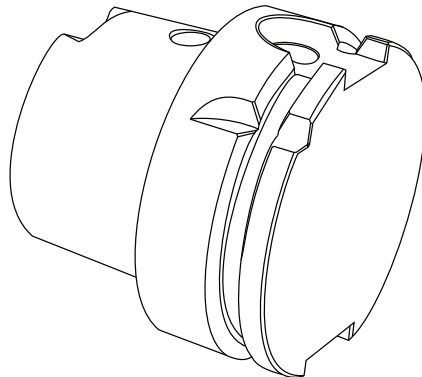


Rev1 22.01  
Rev2 22.11  
Rev3 24.05

# Difference between A/C and A/C/T

- Precise groove (tighter and closer tolerances)
- Normal groove (same as HSK-A/C)

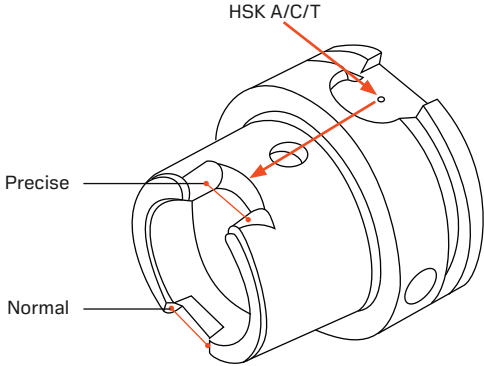


# Coolant tube

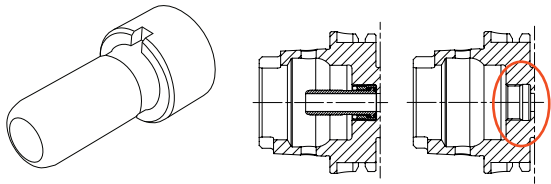

| HSK A/C/T-size | Solid holder | Key         | Torque (Nm) |
|----------------|--------------|-------------|-------------|
| 40             | 5692 022-02  | 5680 094-02 | 10          |
| 50             | 5692 022-03  | 5680 094-03 | 15          |
| 63             | 5692 022-04  | 5680 094-04 | 20          |
| 80             | 5692 022-05  | 5680 094-05 | 25          |
| 100            | 5692 022-06  | 5680 094-06 | 30          |
| 125            | 5692 022-07  | 5680 094-07 | 30          |

# Weldon adaptors

Remove screw (4x) for coolant

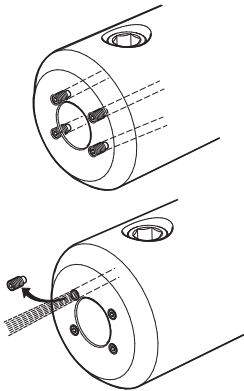

| Weldon Ø | Coolant screw |
|----------|---------------|
| <10      | 3214 020-155  |
| ≥10      | 3214 020-205  |
| ≥25      | 3214 020-255  |
| ≥38      | 3214 020-306  |