












Silent Tools™

Damped straight adaptors

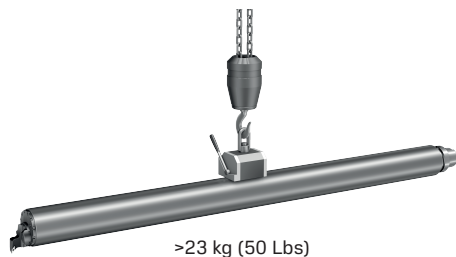


Recommended overhang
(from insert tip to clamping)

Clamping
(minimum 4 x bar
diameter)*

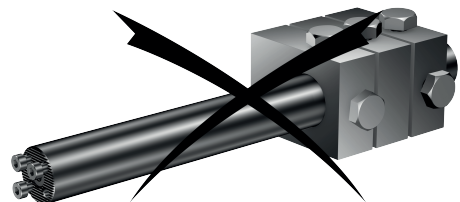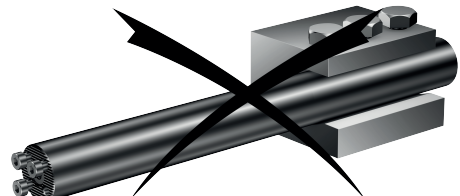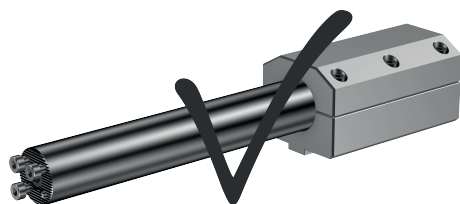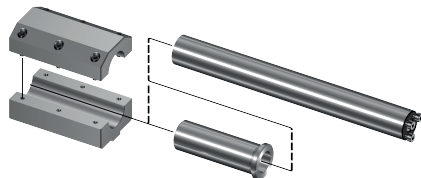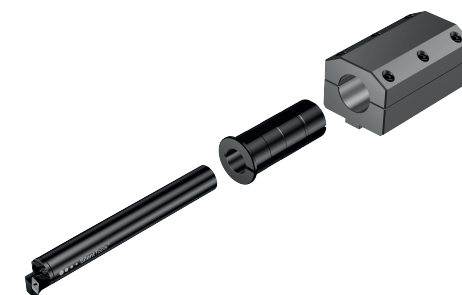

EasyFix™

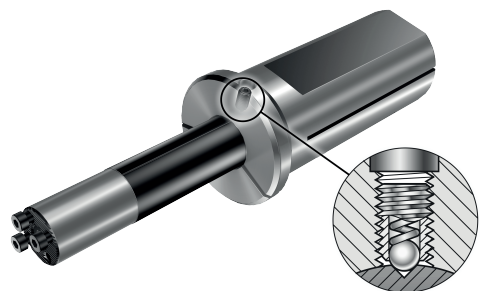

EasyFix™ - Sleeves for
correct mounting of
cylindrical bars

sandvik.coromant.com/easyfix




Tool Status Checker

Order code
SL-TSC-01






HT30D xx xxx

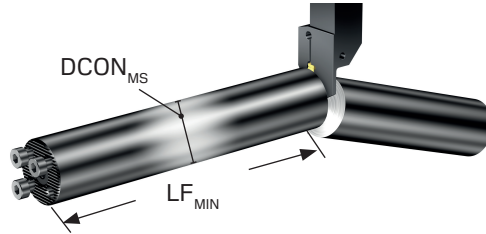

HT31D xx xxx Ø25 ≥

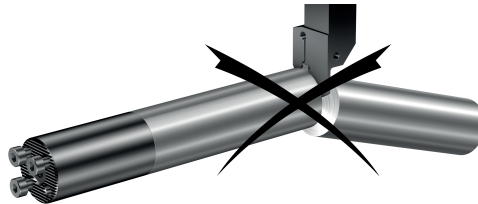

		Nm (Lbs)
SL16	3212 012-156	2.0 (2.1)
SL20	3212 012-206	3.0 (2.2)
SL25	3212 012-257	5.0 (3.7)
SL32	3212 012-307	7.0 (5.2)
SL40	3212 012-358	15.0 (11.1)
SL-QC 80	5512 046-02	50.0 (37.0)

		Torx Plus IP
SL16	5680 084-06	10
SL20	5680 084-02	15
SL25	5680 084-07	20
SL32	5680 084-24	25
SL40	5680 084-14	30
SL-QC 80	5680 035-15	40

SL Quick change



DCON _{MS} mm	Length after cut off (LF _{MIN})	
	Short design mm	Long design mm
16	120	160
20	150	200
25	190	255
32	230	320
40	290	410
50	370	520
60	450	630
80	595	835
100	755	1055


DCON _{MS} inch	Length after cut off (LF _{MIN})	
	Short design inch	Long design inch
0.625	4.7	6.3
0.75	5.8	7.7
1.00	7.5	10.1
1.25	8.7	12.5
1.50	10.8	15.3
1.75	12.8	18.0
2.00	14.8	20.8
2.50	18.8	26.3
3.00	22.2	31.3
4.00	30.3	42.2

Note: Min. clamping length of 4 × DCON_{MS}

CoroPlus® Tool Guide



sandvik.coromant.com/toolguide

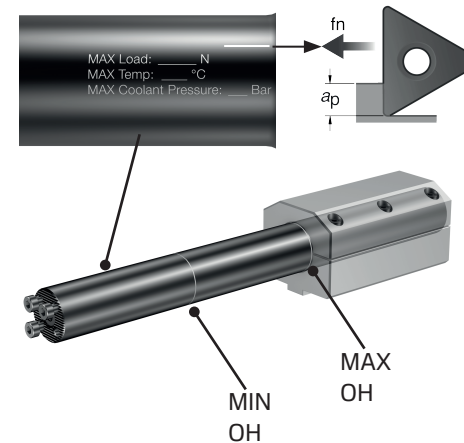

Learn more about Silent Tools™
sandvik.coromant.com/silenttools



March 2024
© AB Sandvik Coromant

